

# LSV-M20-2 NCP

2-Way,2-Position,Normally closed  
Poppet-type Solenoid Valve

## DESCRIPTION

A solenoid operated, 2-way, 2-position, normally closed, poppet-type cartridge valve.

## OPERATION

When de-energized, the valve acts as a check valve, allowing flow from ① to ②, while blocking flow from ② to ①.


When energized, the poppet lifts to open the ② to ① flow path.

## Operation of Manual Override Option

To override, twist counterclockwise 2 turns.


To return to normal operation, twist clockwise 2 turns.

## SYMBOL




## SPECIFICATIONS

Operating Pressure	207bar
Flow	See PRESSURE DROP VS.FLOW graph.
Internal Leakage	2 drops/min max. at 207bar
Temperature	-40°F to +212°F(-40°C to +100°C)
Coil Duty Rating	Continuous from 85% to 115% of nominal voltage
Filtration	See page N-1
Fluids	Mineral-based fluids with viscosities of 7.4 to 420 cSt.
Cavity	HYDAC 06020, See page M-26
Housing Material	6061-T6 aluminum alloy rated to 207bar, Steel & Ductile iron rated to 350bar

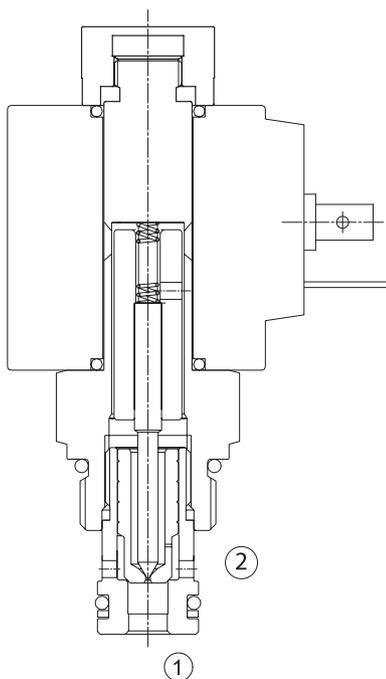


## PRESSURE DROP VS.FLOW

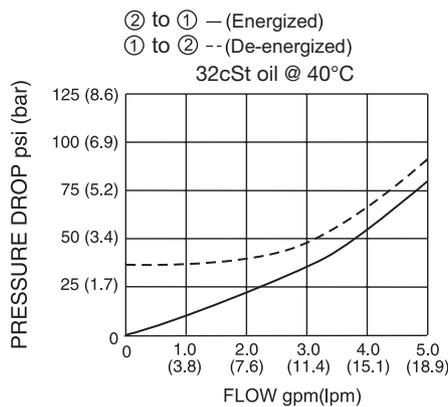

**TO ORDER**

**LSV – M20 – 2 NC P – \* – \* \* – \*\***



- 1 Function**  
LSV=Solenoid Valve

---

- 2 Size**  
M20=M20 Size

---

- 3 Flow Path**  
2=2-Way

---

- 4 Style**  
NC=Normally Closed

---

- 5 Type**  
P=Poppet

---

- 6 Manual Override Options**  
Omit=None  
M=Manual Override

- 7 Coil Voltage**  
1=12 VDC  
2=24 VDC  
3=110 VAC  
4=220 VAC  
5=10 VDC  
7=48 VDC  
8=24 VAC

---

- 8 Coil Connector Type**  
D= Double Lead  
S= Single Lead  
H= Hirschmann  
ER= Deutsch Connector(Water-proof Coil)  
E= Single Stud

- 9 Port Size**  
Omit=None  
4T=SAE 4  
6T=SAE 6  
2G=G 1/4  
3G=G 3/8

---

- ※Other port sizes are available

**INSTALLATION DIMENSIONS**

Coil Must Be Installed With Letter Up

Unit=Millimeters

