

LSV3-58-2 NCP

2-Way,2-Position,Normally closed
 Poppet-type Solenoid Valve
 (Low Flow)


DESCRIPTION

A solenoid operated, 2-way, 2-position, normally closed, poppet-type bi-directional cartridge valve.

OPERATION


When de-energized, the valve blocks in both directions until pressure rating is achieved. When pressure on port ① exceeds rating, flow is allowed to pass from ① to ②. When energized the needle point lifts to allow flow in both directions. Port ② is recommended as the load-holding port.

SYMBOL




SPECIFICATIONS

Max.Operating Pressure	207bar
Proof Pressure	520bar
Flow	See PRESSURE DROP VS.FLOW graph
Internal Leakage	2 drops/min max. at 207bar
Temperature	-40°F to +212°F(-40°C to +100°C)
Coil Duty Rating	Continuous from 85% to 115% of nominal voltage
Filtration	See page N-1
Fluids	Mineral-based fluids with viscosities of 7.4 to 420 cSt.
Cavity	08-2,See page M-1
Housing Material	6061-T6 aluminum alloy rated to 207bar, Steel & Ductile iron rated to 350bar

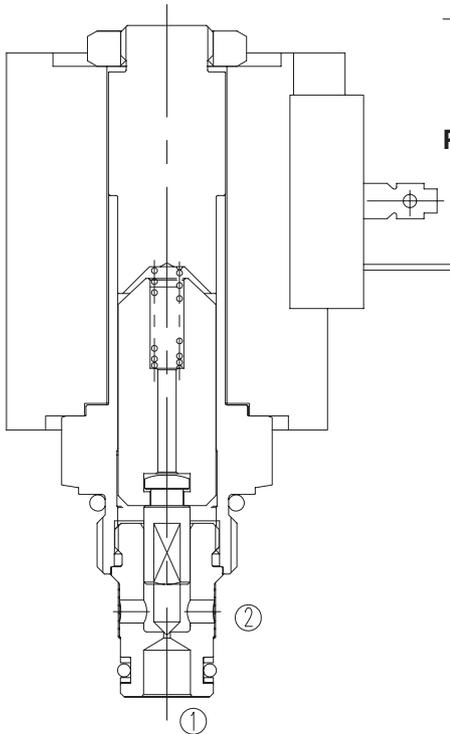


PRESSURE DROP VS.FLOW

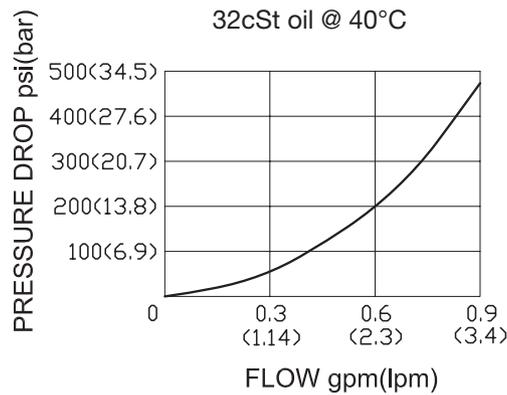

TO ORDER

LSV3 - 58 - 2 NC P - * * - * *



- 1 Function**
LSV3=Solenoid Valve

- 2 Size**
58=58 Size

- 3 Flow Path**
2=2-Way

- 4 Style**
NC=Normally Closed

- 5 Type**
P=Poppet

- 6 Coil Voltage**
1=12 VDC
2=24 VDC
3=110 VAC
4=220 VAC
5=10 VDC
7=48 VDC
8=24 VAC

- 7 Coil Connector Type**
D= Double Lead
S= Single Lead
H= Hirschmann
ER= Deutsch Connector(Water-proof Coil)
B= Double Spade

- 8 Port Size**
Omit=None
4T=SAE 4
6T=SAE 6
2G=G 1/4
3G=G 3/8

- ※ See page K-1 for detail of housing
- ※ Other port sizes are available

INSTALLATION DIMENSIONS

Coil Must Be Installed With Letter Up

Unit=Millimeters

